

Technical Data Sheet

PPA-CF Filament

PPA-CF is an FFF 3D printing filament, which is produced using LUVOCOM® PPA-CF. It is a modified polyphthalamide (PPA) containing 10% carbon fiber, offering high-temperature resistance, low moisture absorption, and low shrinkage, with the ability to be printable on non-heated chamber FFF 3D printers. Models printed with PPA-CF exhibit excellent tensile and impact strength, with a heat deflection temperature of up to 220°C. It also provides outstanding creep resistance at high temperatures, minimizing the impact of humidity and temperature on dimensional stability and electrical properties.

Features:

High rigidity/High strength/High-temperature resistance/Low creep

Properties:

Physical Properties	Test Method	Units	Typical Value
Density	ISO 1183	g/cm ³	1.21~1.23
Melt Flow Rate (MFR) (280°C/5Kg)	ISO 1133	g/10min	35~40
Water Absorption (23°C/24h)	ISO 62	%	<0.1
Mechanical Properties			
Tensile Strength (X-Y)	ISO 527	Mpa	108~112
Elongation at Break (X-Y)	ISO 527	%	3.5~5
Modulus of Elasticity (X-Y)	ISO 527	Mpa	7100~8000
Bending Strength (X-Y)	ISO178	Mpa	210~221
Bending Strength (Z)	ISO178	Mpa	70~75
Bending Modulus (X-Y)	ISO178	Mpa	6500~7000
Bending Modulus (Z)	ISO178	Mpa	2520~2620
Izod Impact Strength (X-Y)	ISO180	KJ/m ²	9~11



Izod Impact Strength (Z)	ISO180	KJ/m ²	2.5~3
Thermal Properties			
HDT@ 0.455 MPa (66 psi)	ISO75	°C	220
Continuous Service Temperature	IEC 60216	°C	120
Electrical Properties			
Surface Resistance	IEC 60093	Ω	≤10 ³

Testing Specimen Printing Conditions:

Test Equipment	Guider 3 Ultra (Flashforge)
Nozzle Diameter	0.4mm
Nozzle Temperature	270 °C
Printing Speed	200mm/s
Wall Thickness	0.4mm
Infill	100%
Standard Testing Specimen	Specific dimensions are shown in Attachment 1.

Recommended Printing Conditions:

Parameter	
Nozzle Temperature	255~275°C (270°C recommended)
Build Platform Temperature	80~100°C (90°C recommended)
Build Surface Material	Tempered glass, BuildTak, Carbon fiber plate, PEI
Nozzle Diameter	φ0.4/0.6mm
Nozzle & Gear Material	Hardened steel
Cooling Fan	0~30%
Layer Thickness	0.2~0.4mm
Printing Speed	60~250mm/s (200mm/s recommended)
Travel Speed	60~500mm/s
Ambient Temperature for Printing	Room temperature~80°C
Retraction Distance	0.5~1.5mm
Retraction Speed	20~40mm/s



Cautions:

In order to prevent moisture absorption and contamination, supplied packaging should be kept closed and undamaged. For the same reason, partially used filaments should be re-sealed before storage.


In case the filament has become wet, it should be dried before being used. Using a hot dry air oven at 120°C for at least 8 hours is recommended in order to ensure the print success rate and quality. If PPA-CF is used as the support material for itself, please remove the support structure as soon as the model cools down. Otherwise, the support structure can be bonded to the model, which will make the support hard to remove.

After the printing process, it is recommended to dry the model in the oven at 80-100°C for 1-3 hours to increase the strength of the model.


Disclaimer:

Since the conditions of use and applicable laws may vary from place to place and from time to time, customers are responsible for determining whether the products and product information in this document are suitable for customers to use, and ensuring that their workplaces and methods of handling products comply with applicable laws and other government regulations. This company does not assume any responsibility or obligation for the information in this document, nor does it provide any guarantee. All implied warranties regarding the saleability of the product or the applicability for a particular purpose under this document are expressly excluded here.


Attachment 1: Testing Specimen Size and Printing Direction

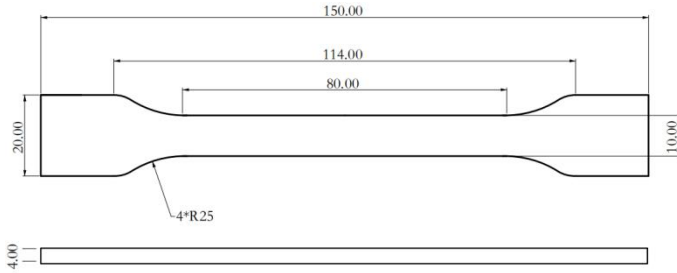

Tensile testing specimen; ASTM D638 (ISO 527, GB/T 1040)

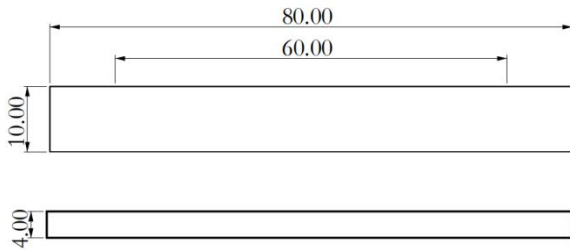

Flexural testing specimen; ASTM D790 (ISO 178, GB/T 9341)

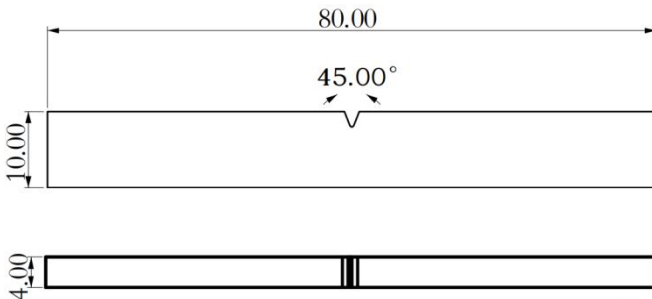

Impact testing specimen; ASTM D256 (ISO 179, GB/T 1043)